


# CP165-LH

# TAPERED CLAMPING SCREWS (Hook)

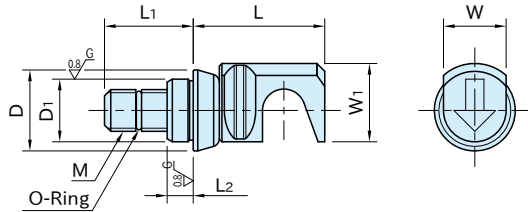

Tapered Bushing	Clamping Screw	O-Ring
S45C steel Black oxide finished Precision ground	SCM435 steel Quenched and tempered Black oxide finished	Nitrile rubber (NBR)

Part Number	M	D <sub>1</sub> (g6)	L <sub>2</sub>	L <sub>1</sub>	D	L	W <sub>1</sub>	W	O-Ring Size for Replacement	Weight (g)	Proper Clamping Module
CP165-08001LH	M 8×1.25	12	5	17	15.5	25	15	12	SS050 (CS1 / ID 5)	30	CP160-08040R, CP160-08040L
CP165-12001LH	M12×1.75	18	6	24	24.5	40	23.5	19	S 8 (CS1.5 / ID 7.5)	115	CP160-12063R, CP160-12063L
CP165-16001LH	M16×2	22	7.5	30	31.5	51	30	24	S 12 (CS1.5 / ID11.5)	235	CP160-16080R, CP160-16080L

## Reference

Feature and How To Use in later page